


## TYPE C - X ADJUSTABLE OUTRIGGER STABILIZER

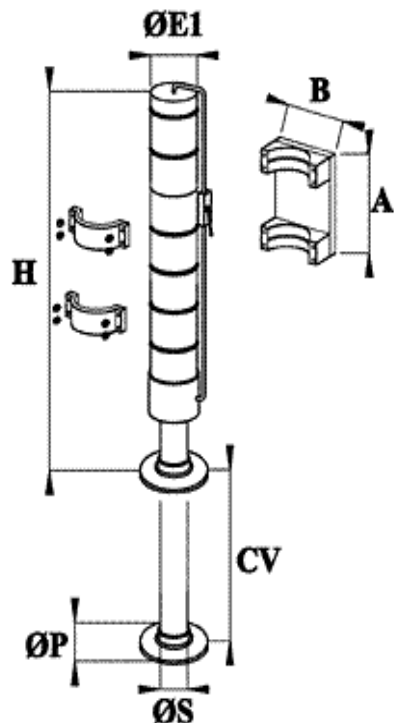

SERIES				MAIN DIMENSIONS (mm)										
SERIES #	DIMENSIONS (mm)		TOTAL Kg	PLATE		CYLINDER						MAX. LOADING		
	C	D		A x B	Kg	CV	ØP	ØE1	ØI	ØS	H	Kg	PLATE	daN
0A - 0/S-CR	25	75	1	180 X 140	1.8	355	160	75	60	40	530	14	PF	8,000
1/S-CR	30	87.5	1.5	210 X 160	2.5	455	160	90	70	60	685	34	PF	24,600
1/L-CR	30	87.5	1.5	210 X 160	2.5	580	160	90	70	60	810	39	PF	15,100
2/C-CR	60	90	3.5	240 X 170	3.5	470	200	100	80	60	700	40	PF	23,100
2/S-CR	60	90	3.5	240 X 170	3.5	550	200	100	80	60	780	42	PF	16,800
2/L-CR	60	90	3.5	240 X 170	3.5	635	200	100	80	60	865	47	PF	12,600
3/C-CR	60	90	3.5	240 X 170	3.5	470	200	100	80	60	750	42	PS	19,600
3/S-CR	60	90	3.5	240 X 170	3.5	550	200	100	80	60	830	44	PS	14,300
3/L-CR	60	90	3.5	240 X 170	3.5	635	200	100	80	60	915	49	PS	10,700
4/C-CR	60	125	5	270 X 220	7	565	200	110	90	70	850	53	PS	25,100
4/L-CR	60	125	5	270 X 220	7	735	200	110	90	70	1010	61	PS	14,880
5/C-CR	60	100	5.5	360 X 200	8	460	200	120	100	90	850	69	PS	103,000
5/L-CR	60	100	5.5	360 X 200	8	610	200	120	100	90	1000	81	PS	58,400
6/C-CR	60	100	5.5	280 X 200	7	460	200	120	100	90	850	69	PS	103,000
6/L-CR	60	100	5.5	280 X 200	7	610	200	120	100	90	1000	81	PS	58,400
7/C-CR	70	100	9	300 X 235	10.5	470	180	140	120	100	860	86	PS	149,000
7/L-CR	70	100	9	300 X 235	10.5	610	180	140	120	100	1000	99	PS	86,400

**BIGMAX**  
BY TECHNOCRANE

www.bigmaxcranes.com

IMPORTANT NOTES: Min pressure 120 Bar - Max pressure 200 Bar

PF = Fixed (Welded) Foot Plate

PS = Swivel Foot Plate